MDR-V600

SERVICE MANUAL

US Model
Canadian Model
AEP Model
E Model

SPECIFICATIONS

Type :	Dynamic, closed
Driver units :	40mm dia., dome type
Impedance :	45 ohms at 1kHz
Sensitivity :	106 dB/mW
Power handling capacity :	1W
Frequency response :	5-30,000Hz
Cord :	Coiled cord
	Length : 1-3m long with a stereo unimatch plug
Weight :	Approx. 260g (without cord)
Supplied accessory :	Carrying case (1)

Design and specifications subject to change without notice.

FEATURES

- The large-diameter (ϕ 40mm) driver unit uses a powerful neodymium magnet which drives delicate and powerful sounds equally well. The driver unit reproduces the original sound source in its full dynamic range.
- "Aura-nomic design"-The driver unit is positioned in accordance with the angle of the ear. Thus, it does not squeeze the ear and fits all ears nicely. The design in most suitable for long hours of listening.
- Folding headphones convenient for carrying and storing.
- The single coiled cord is used for the headphone cord which is made of OFC litz wire.
  Concealed type relay cord which is stored in the slider.
- Self-closing mechanism incorporated, preventing sound leakage when you take off the headphones.

ACCESSORIES AND SCREWS

Ref. No.	Part No.	Description	Remark
		ACCESSORIES & PACKING MATERIALS	
		******	
*	4-953-510-01	CASE	
*	4-953-511-01	CUSHION	
*	4-953-517-01	CARDBOARD (US)	
*	4-953-520-01	CARDBOARD (Canadian, AEP, E)	
	4-954-463-11	CASE, SOFT (US)	

****

Ref. No.	Part No.	Description	Remark
		******	
		HARDWARE LIST	
		******	
#1	7-621-255-40	SCREW +P 2X6	
#2	7-621-255-65	SCREW +P 2X10	
#3	7-622-205-05	NUT M2 TYPE2	
#4	7-671-112-11	BALL, STAINLESS (2.5 DIA)	
#5	7-685-102-19	SCREW +P 2X4 NON-SLIT TYPE 2	
#6	7-685-103-19	SCREW +P 2X5 TYPE2 NON-SLIT	
#7	7-685-132-19	SCREW +P 2.6X5 TYPE2 NON-SLIT	

STEREO HEADPHONES

SONY®

EXPLODED VIEW

NOTE:

- -XX, -X mean standardized parts, so they may have some differences from the original one.
- The construction parts of an assembled part are indicated with a collation number in the remark column.
- Items marked "*" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- The mechanical parts with no reference number in the exploded views are not supplied.

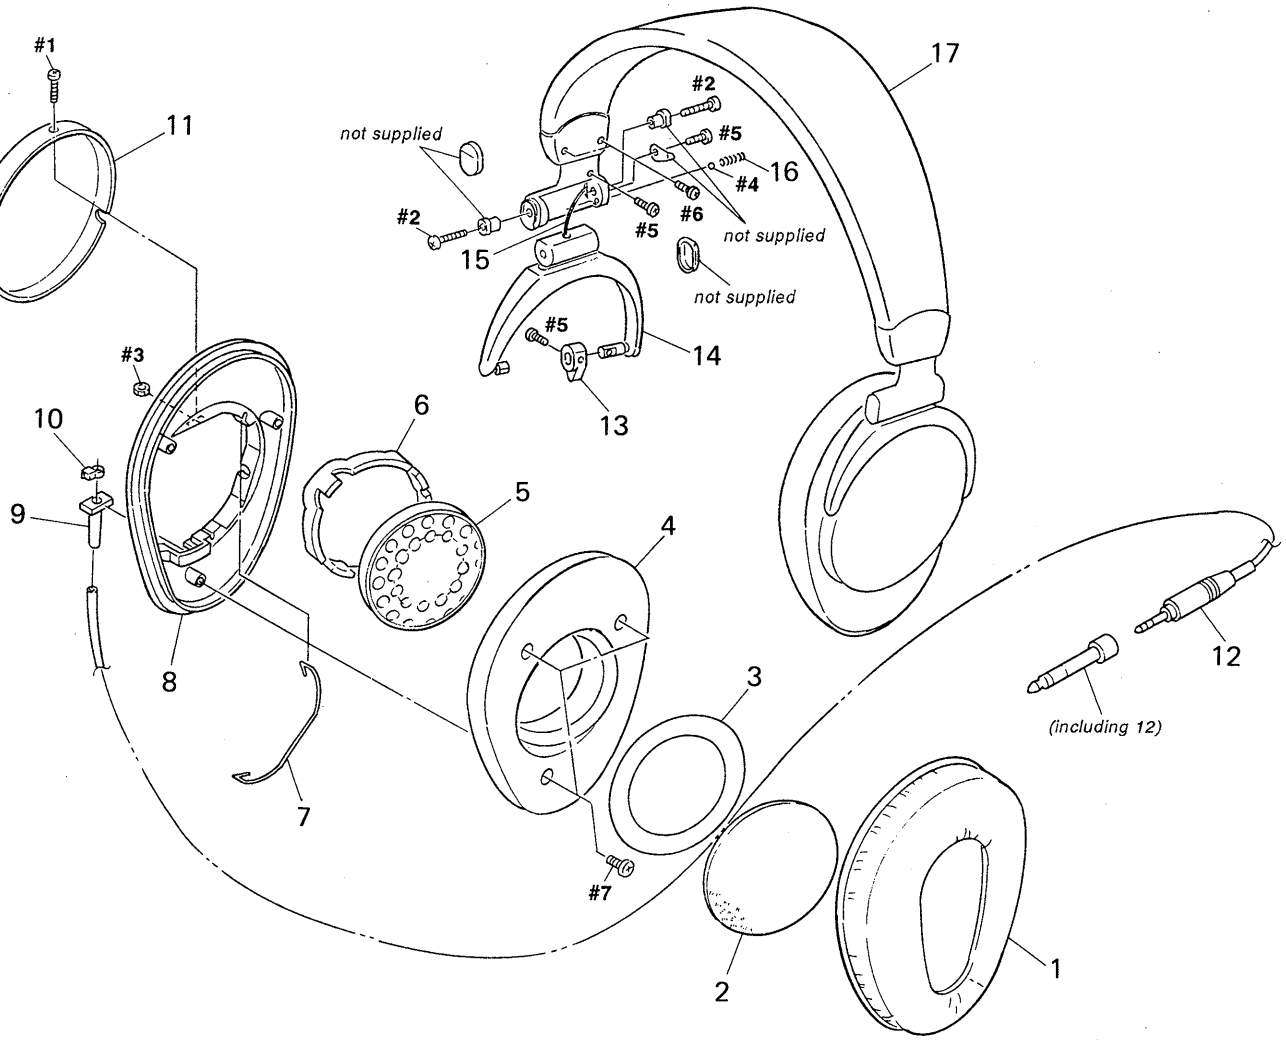

• Refer to page 1 for Accessories and Screws.

Ref.No.	Part No.	Description	Remark
1	4-954-041-11	PAD (L), EAR	
1	4-954-042-11	PAD (R), EAR	
2	4-954-044-01	URETHAN, FRONT	
3	4-954-049-01	REGISTER, FRONT	
4	4-954-045-01	PLATE (L), FRONT	
4	4-954-046-01	PLATE (R), FRONT	
5	1-505-138-11	DRIVER	
6	4-954-050-01	STOPPER, DRIVER	
7	4-954-039-01	SPRING, HANGER	
8	4-954-010-11	FLANGE (L)	
8	4-954-011-11	FLANGE (R)	

Ref.No.	Part No.	Description	Remark
9	4-954-013-01	BUSHING	
* 10	3-671-893-00	CLAMP (LOW TYPE)	
11	4-954-047-01	CAP (L), HOUSING	
11	4-954-048-01	CAP (R), HOUSING	
12	1-696-609-21	CORD (WITH PLUG)	
13	4-954-017-01	CAM, HANGER	
14	X-4943-118-1	HANGER (L) ASSY	
14	X-4943-119-1	HANGER (R) ASSY	
15	1-558-092-11	WIRE, SHIELD (1 CORE)	
* 16	2-266-942-00	SPRING, COMPRESSION	
17	A-4540-172-A	BAND ASSY, HEAD	

9-957-443-11

Sony Corporation
General Audio Group

English
92H0278-1
Printed in Japan
©1992.8
Published by Customer Relations and Service Group